


INTERMEDIATE ROOF DETAIL TO METAL

SCALE 1:2 on A4


SLIDING SHOE AT INTERMEDIATE
PURLIN, CAN BE FIXED TO R. S.
SECTION WITH EITHER SINGLE
OR DOUBLE HOLE FIXINGS
(60 C/CTS). IF RHS MEMBER USE
2 No. TAPPED OR 2 No. TEK
FIXINGS AT 60 C/CTS.
ISOLATE DIS-SIMILAR METALS

LONSDALE THERMGARD
SERIES GLAZING BAR

INTERMEDIATE PURLIN

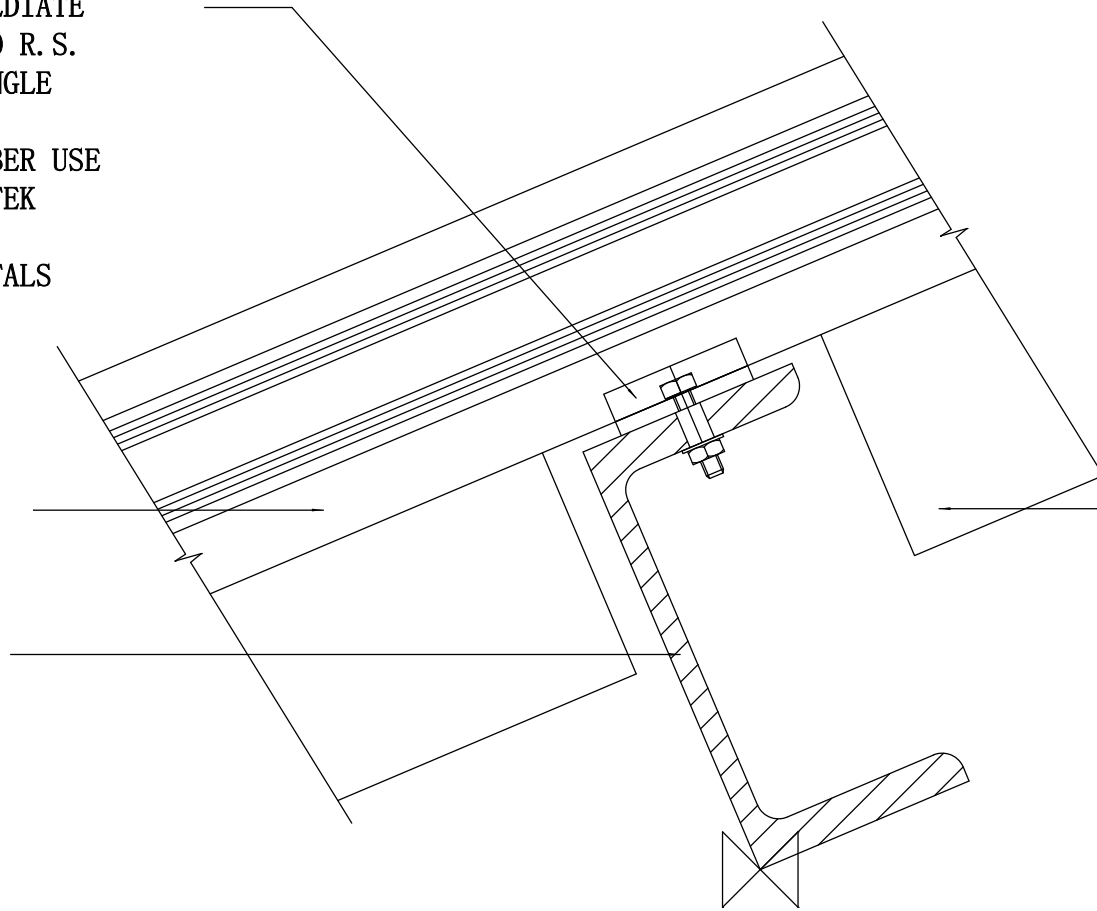

Application

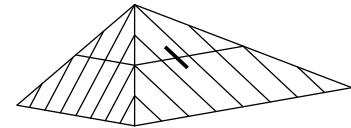

LONSDALE BOX SECTION SPANS
BETWEEN SUPPORTS AND IS
FACTORY FITTED OR POSITIVELY
FIXED ON SITE